


# Statecznik magnetyczny LSI-LL 30W

Kod ElektriKo: 98652

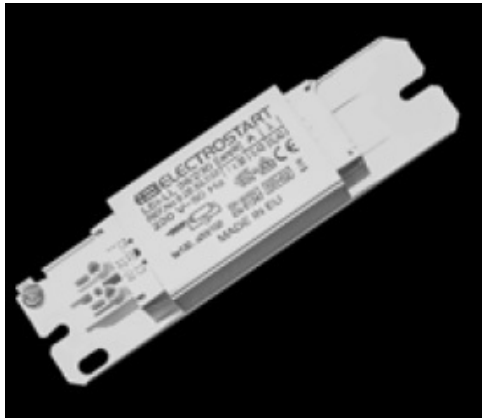

**UWAGA:** Zdjęcie poglądowe dla całej rodziny produktów.

moc: 36/40W

napięcie znamionowe: 230V 50HZ

źródło światła: T8/LC

| LSI-LL   | Ref.No      | Ballast |              |         |         |         | Lamp   |       |      |            | Cp $\mu$ F | EEI | EN 61347<br>$\Delta t / \Delta \tan^{\circ}C$ |
|----------|-------------|---------|--------------|---------|---------|---------|--------|-------|------|------------|------------|-----|-----------------------------------------------|
|          |             | V, Hz   | Weight<br>kg | C<br>mm | I<br>mm | L<br>mm | W      | A     | Type | Cos $\phi$ |            |     |                                               |
| 15 W     | 9.26.53.315 | 230, 50 | 0.44         | 50      | 137.5   | 155     | 1 x 15 | 0,310 | T8   | 0.32       | 4,3        | B2  | 65/110                                        |
| 2 x 15 W | 9.26.53.415 | 230, 50 | 0.44         | 50      | 137.5   | 155     | 2 x 15 | 0,310 | T8   | 0.52       | 4,3        | B2  | 65/130                                        |
| 15 W     | 9.26.53.815 | 230, 50 | 0.50         | 60      | 137.5   | 155     | 1 x 15 | 0,350 | T8   | 0,29       | 4,3        | B2  | 60/110                                        |
| 15 W     | 9.26.53.015 | 230, 50 | 0.59         | 71      | 137.5   | 155     | 1 x 15 | 0,350 | T8   | 0,29       | 4,3        | B2  | 55/90                                         |
| 18 W     | 9.26.53.818 | 230, 50 | 0.50         | 60      | 137.5   | 155     | 1 x 18 | 0,370 | T8   | 0.32       | 4,3        | B2  | 65/115                                        |
| 2 x 18 W | 9.26.53.718 | 230, 50 | 0.50         | 60      | 137.5   | 155     | 2 x 18 | 0,370 | T8   | 0.53       | 4,3        | B2  | 65/150                                        |
| 18 W     | 9.26.53.018 | 230, 50 | 0.59         | 71      | 137.5   | 155     | 1 x 18 | 0,370 | T8   | 0.32       | 4,3        | B2  | 60/95                                         |
| 30 W     | 9.26.53.830 | 230, 50 | 0.50         | 60      | 137.5   | 155     | 1 x 30 | 0,365 | T8   | 0,48       | 4,3        | B2  | 60/140                                        |
| 30 W     | 9.26.53.030 | 230, 50 | 0.59         | 71      | 137.5   | 155     | 1 x 30 | 0,365 | T8   | 0.50       | 4,3        | B2  | 65/120                                        |
| 32 W     | 9.26.53.032 | 230, 50 | 0.59         | 71      | 137.5   | 155     | 1 x 32 | 0,450 | T-R  | 0.41       | 4,3        | B2  | 65/125                                        |
| *36 W    | 9.26.53.033 | 230, 50 | 0.57         | 66      | 137.5   | 155     | 1 x 36 | 0,430 | T8   | 0.45       | 4,3        | B2  | 55/150                                        |
| 36 W     | 9.26.53.034 | 230, 50 | 0.56         | 66      | 137.5   | 155     | 1 x 36 | 0,430 | T8   | 0.45       | 4,3        | B2  | 55/175                                        |

|       |             |         |      |     |       |     |        |       |    |      |     |    |        |
|-------|-------------|---------|------|-----|-------|-----|--------|-------|----|------|-----|----|--------|
| *36 W | 9.26.53.035 | 230, 50 | 0.59 | 71  | 137.5 | 155 | 1 x 36 | 0,430 | T8 | 0.45 | 4,3 | B2 | 55/150 |
| 36 W  | 9.26.53.036 | 230, 50 | 0.59 | 71  | 137.5 | 155 | 1 x 36 | 0,430 | T8 | 0.45 | 4,3 | B2 | 55/135 |
| 36 W  | 9.26.53.037 | 230, 50 | 0.80 | 104 | 180   | 195 | 1 x 36 | 0,430 | T8 | 0,44 | 7   | B2 | 35/85  |
| 58 W  | 9.26.53.054 | 230, 50 | 0.85 | 104 | 180   | 195 | 1 x 58 | 0,670 | T8 | 0,47 | 6   | B2 | 55/165 |
| *58 W | 9.26.53.056 | 230, 50 | 0.96 | 121 | 180   | 195 | 1 x 58 | 0,670 | T8 | 0.47 | 6   | B2 | 55/145 |
| 58 W  | 9.26.53.055 | 230, 50 | 1.00 | 127 | 180   | 195 | 1 x 58 | 0,670 | T8 | 0.47 | 6   | B2 | 55/135 |
| *58 W | 9.26.53.057 | 230, 50 | 1.01 | 127 | 180   | 195 | 1 x 58 | 0,670 | T8 | 0.46 | 6   | B2 | 50/120 |
| 70 W  | 9.26.53.070 | 230, 50 | 1.01 | 127 | 180   | 195 | 1 x 70 | 0,700 | T8 | 0,52 | 7   | B2 | 50/155 |